

A Quality Product from Hawkeye Industries, Inc.

Duratec® Thinner



A blend of solvents formulated to enhance the flow and leveling properties of Duratec primers and hi-gloss coatings.

Features

- Matches the solvent cut of the Duratec product line.
- Low HAPS
- Low water content
- Efficient: Small additions of Duratec thinner quickly cut the viscosity of Duratec Primers and Topcoats.


Usage

For use with all Duratec products requiring thinning prior to use.

Features

Duratec Thinner enhances the flow and leveling properties of Duratec primers and hi-gloss coatings. The end result is reduced porosity and orange peel.

Duratec Thinner 39LAC-3

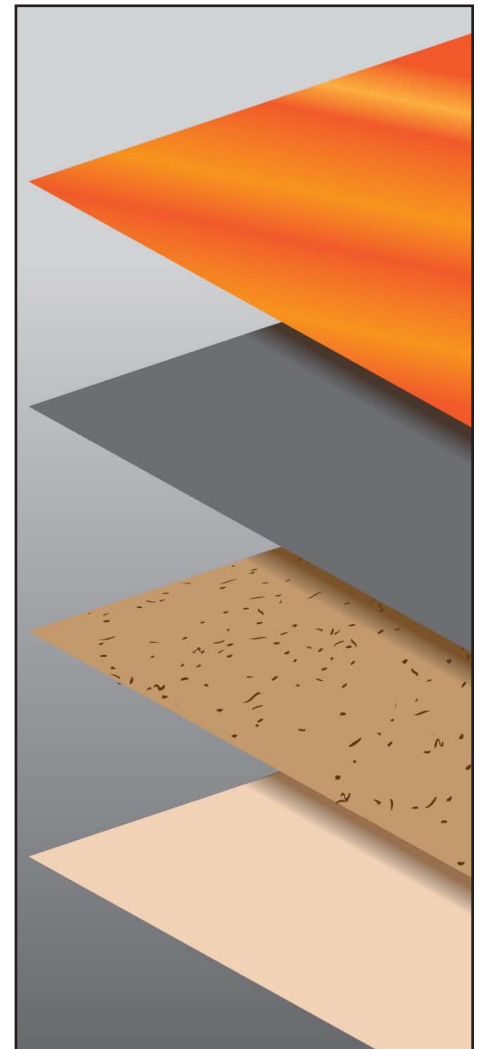

Hawkeye Industries

P. O. Box 415, Bloomington, CA 92316
(USA) 800-977-0060 • (Outside USA) 909-546-1160 • Fax 909-546-1161
Email: hawkeyesales@hawkeyeind.com • www.duratec1.com

Limited/ warranty statement: Our products are intended for sale to industrial and commercial customers. We request that customers inspect and test our products before use and satisfy themselves as to contents and suitability. Nothing herein shall constitute a warranty, expressed or implied, including any warranty of merchantability or fitness, nor is protection from any law or patent to be inferred. All patent rights are reserved. The exclusive remedy for all proven claims is replacement of our materials and in no event shall we be liable for special, incidental or consequential damages.



Product No. 39 LAC-3

Data Sheet
Continued

Duratec® Thinner

Page: 2

Product Properties: All time calculations are based on temperatures of 77°F, 25°C

Paint Related Material	UN1263
Flash Point.....	23°F
Specific Gravity.....	.797 gm/cc @ 20° C
Weight per Gallon.....	6.65 lbs
Evaporation Rate.....	> 1 (n-butyl acetate = 1)
Vapor Pressure.....	41.3 mm hg

Revised 02-06-14



Hawkeye Industries

P. O. Box 415, Bloomington, CA 92316
(USA) 800-977-0060 • (Outside USA) 909-546-1160 • Fax 909-546-1161
Email: hawkeyesales@hawkeyeind.com • www.duratec1.com

Limited/ warranty statement: Our products are intended for sale to industrial and commercial customers. We request that customers inspect and test our products before use and satisfy themselves as to contents and suitability. Nothing herein shall constitute a warranty, expressed or implied, including any warranty of merchantability or fitness, nor is protection from any law or patent to be inferred. All patent rights are reserved. The exclusive remedy for all proven claims is replacement of our materials and in no event shall we be liable for special, incidental or consequential damages.